

MAX LIFE™

CARBIDE EDGE OPENERS




EMBEDDED
CARBIDE ON
NOSE

200-SPK-0200ML

FITS 200 SERIES SPEED-LOC™ (47° SHANK)

Heat applied, embedded carbide has been added to the nose of this quick change spike. The spike is 5/8" (15 mm) thick, 2-1/4" (57 mm) wide and 6" (150 mm) long. It has a hardened wear pad (52-56 HRC) for extra life. This tool is ideal for primary tillage or banding fertilizer.

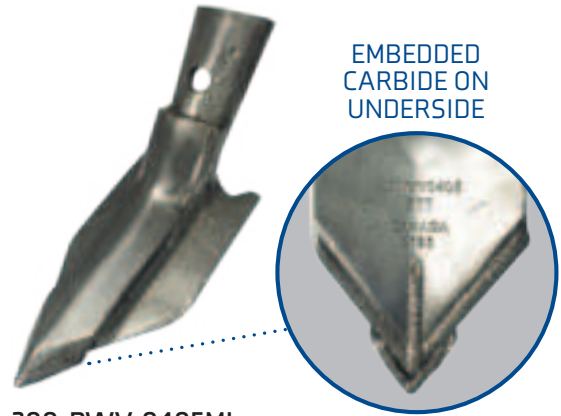

EMBEDDED
CARBIDE ON
UNDERSIDE

Underside View

200-PWV-0405ML

FITS 200 SERIES SPEED-LOC™ (47° SHANK)

Heat applied, embedded carbide has been added to the underside of this sweep. The sweep is 1/4" (6 mm) thick and 4" (100 mm) wide. It is designed mainly for fall tillage or deep working. It has a hardened wear pad (52-56 HRC) which increases the life expectancy. The nose on this sweep runs 1/2" (12 mm) lower than the other 200 Series sweeps. This increased pitch improves penetration in hard or compacted ground.




EMBEDDED
CARBIDE ON
NOSE

410-SPK-0200ML

FITS 410 SERIES SPEED-LOC™

Heat applied, embedded carbide has been added to the nose of this heavy-duty quick change spike. The spike is 2" (50 mm) wide, 5/8" (15 mm) thick and 9" (230 mm) long. It has a hardened wear pad (52-56 HRC) for extra life. This tool is ideal for primary tillage or banding fertilizer.

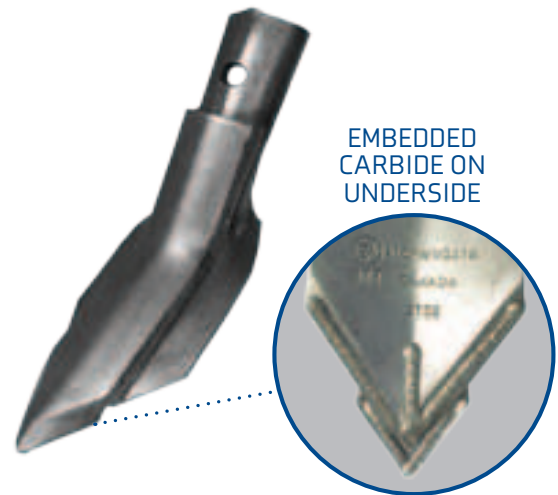

EMBEDDED
CARBIDE ON
UNDERSIDE

Underside View

410-PWV-0418ML

FITS 410 SERIES SPEED-LOC™

Heat applied, embedded carbide has been added to the underside of this sweep. The sweep has a 3/8" hardened wear pad (52-56 HRC) for longer life. The sweep is 5/16" (8 mm) thick and 4" (100 mm) wide. This sweep runs at a 13° pitch, which is steeper than the regular 410 sweep.