

200-GFO-0308

GOOSEFOOT

This "Goosefoot" tillage tool is 5/16" (8 mm) thick by 2-1/2" (63 mm) wide. It is designed specifically for vibrating S-tine cultivators.

200-PWV-0405

SWEEP WITH HARDENED WEAR PAD

This sweep is 1/4" (6 mm) thick by 4" (100 mm) wide. It is designed mainly for fall tillage or deep working. It has a 3/8" hardened wear pad (52-56 HRC) which increases the life expectancy. The nose on this sweep runs 1/2" (12 mm) lower than the other 200 Series sweeps. This increased pitch improves penetration in hard or compacted ground and increases disturbance. This tool is ideal for primary tillage or banding fertilizer.

200-PWV-0405ML

MAX LIFE™ SWEEP W/ HARDENED WEAR PAD

Heat applied, embedded carbide has been added to the underside of this sweep. The sweep is 1/4" (6 mm) thick by 4" (100 mm) wide. It is designed mainly for fall tillage or deep working. It has a hardened wear pad (52-56 HRC) which increases the life expectancy. The nose on this sweep runs 1/2" (12 mm) lower than the other 200 Series sweeps. This increased pitch improves penetration in hard or compacted ground and increases disturbance.

200-PWV-0428 200-PWV-0528


SWEEP WITH HARDENED WEAR PAD

These sweeps are 5/16" (8 mm) thick. **200-PWV-0428** is 4" (100 mm) wide and **200-PWV-0528** is 5" (127 mm) wide. It is designed mainly for fall tillage or deep working. It has a 3/8" x 2" hardened wear pad (52-56 HRC) which increases its life expectancy.

200-PWV-0738

SWEEP WITH HARDENED WEAR PAD

This sweep is 5/16" (8 mm) thick by 7" (178 mm) wide with a 4" wide extended wear pad.

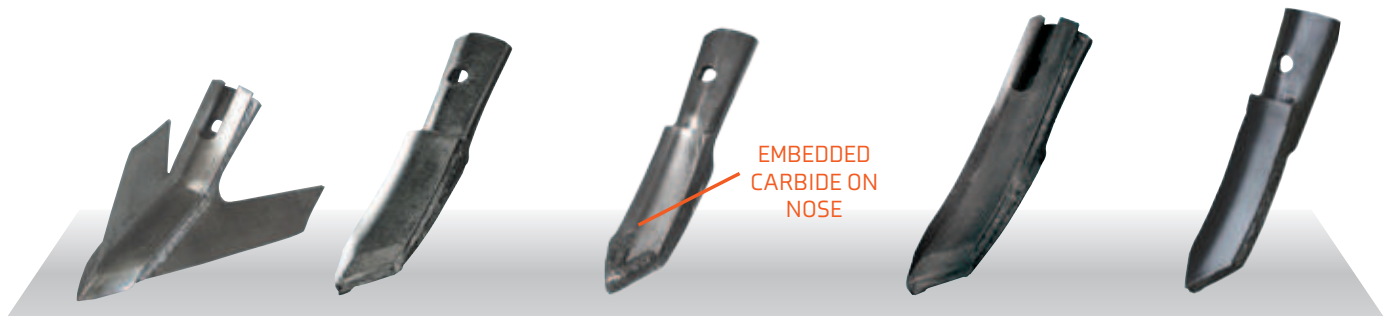

200-PWV-0928

SWEEP WITH HARDENED WEAR PAD

This sweep is 5/16" (8 mm) thick by 9" (230 mm) wide. It has a 3/8" x 2" hardened wear pad (52-56 HRC) that extends up the entire stem which increases its life expectancy.

200-SPK-0200

SPIKE

This quick change spike is 5/8" (15 mm) thick by 2-1/4" (57 mm) wide by 6" (150 mm) long. It has a hardened wear pad (52-56 HRC) for extra life. This tool is ideal for primary tillage or banding fertilizer.

200-SPK-0200ML

MAX LIFE™ SPIKE

Heat applied, embedded carbide has been added to the nose of this quick change spike. The spike is 5/8" (15 mm) thick, 2-1/4" (57 mm) wide and 6" (150 mm) long. It has a hardened wear pad (52-56 HRC) for extra life. This tool is ideal for primary tillage or banding fertilizer.

200-SPK-0215

SPIKE

This quick change spike is 5/8" (15 mm) thick by 2-1/4" (57 mm) wide by 6" (150 mm) long. It has a hardened wear pad (52-56 HRC) that extends to the top of the stem to prevent wear in abrasive soil or when working at greater depths.

200-SPK-0230

SPIKE

This quick change spike is 5/8" (15 mm) thick by 2" (50 mm) wide by 4" (102 mm) long. It has a hardened wear pad (52-56 HRC) for extra life. This tool is made specifically for slurry injection.